

# Case Sealer

LD-7

## Case Sealing for the Real World

This reliable case sealer for industrial environments seals a wide range of cases.



Little David delivers packaging equipment that works for you



Self-centering side rails



(Shown with optional pack table.)

### The LD-7 offers:

- ☑ Low maintenance
- ☑ UL listed
- ☑ Quick changeover
- ☑ Safe single mast
- ☑ Economical
- ☑ Single hand tightening adjustments
- ☑ Interchangeable tape cartridges

### The LD-7 replaces:

- ☑ Expensive labor
- ☑ Hand taping boxes
- ☑ Unsafe machinery

Little David LD-7



**LITTLE DAVID**




[www.loveshaw.com](http://www.loveshaw.com)

# LD-7

## Dimensions:

LD-7:

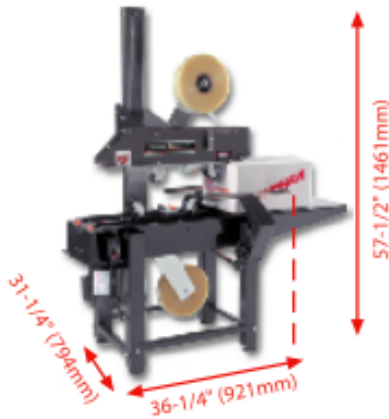

## Additional Case Sealer Models:

Also Available LD-7SS:

- Stainless steel case sealer
- Wash down



Also Available Uniform Legend:

- Semi-automatic case sealer
- Seals top and bottom of uniform box sizes



## Options of the LD-7:

- Casters
- Available for 3" wide tape
- Leg adjustments to accommodate various conveyor heights
- High mast for box heights to 34" (864mm)
- Front and rear solid or roller pack table
- Top squeezers

## Distributor Information:

## Features of the LD-7:

### Reliable Performance - Warranty:

- 1 Year all components\*
- 2 Years Gear Reducer
- 3 Years Cartridge\*

\*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® Distributor for details

### Flexible:

- Tapes boxes from 4-1/2" (114mm) to 24" (610mm)
- Compact design allows for portability

### Easy Operation:

- Plug in operation
- Minimal operator training required
- Sealed drive system
- CaseLocker ST™ tape cartridge requires no lubrication

### Safe:

- UL listed
- Single mast design allows clear access
- Knife guard system of the CaseLocker ST™ tape cartridge allows the blade to be exposed only when the rollers are depressed

## Specifications of the LD-7:

### Power Requirements:

- 115 - 220 Volts, 60 cycle, single phase
- Note: Other voltages available. Contact Loveshaw for details.

### Operating Speed:

- Continuous belt drive; 80' per minute (24.4 m/min.)  
(production rate depends on box size and operator dexterity)

### Weight:

- 196.5 lbs (89 kg) uncrated

### Closure Material:

- Pressure sensitive tape

### Case Capacity: (with 2" wide CaseLocker ST™ Cartridge):

**Length:** 4-1/2" (114mm) - infinite

**Width:** 4-1/2" (114mm) - 22" (559mm)

**Height:** 4-1/2" (114 mm) - 24" (610 mm)

Note: Certain length x width x height combinations may not process due to unstable conveying conditions.



call 800-547-5130

Pyramid Packaging Inc.

[www.pyramidpackaging.com](http://www.pyramidpackaging.com)  
[info@pyramidpackaging.com](mailto:info@pyramidpackaging.com)